


遠心力鉄筋コンクリート管B形 1種

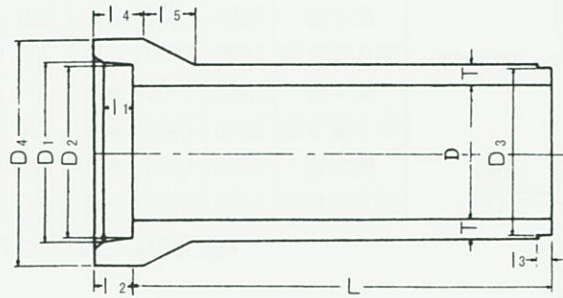

単位：mm

呼び径	内径 D	D ₁	D ₂	D ₃	D ₄	厚さ T	l ₁	l ₂	l ₃	l ₄	l ₅	有効長 L	参考質量 (kg)
150	150	210	206	194	262	26				115	50	2,000	77
200	200	262	258	246	316	27			32	55	103		
250	250	314	310	298	370	28	65	90		60	131		
300	300	368	364	350	424	30				120	165		
350	350	422	418	404	482	32				65	204		
400	400	478	474	460	544	35			36	125	70	2,430	306
450	450	534	530	516	606	38	70	95		75	373		
500	500	592	588	574	672	42				130	85		459
600	600	708	704	690	804	50	75	100		135	100		660
700	700	824	820	802	936	58		105		140	115		899
800	800	940	936	918	1,068	66	80	110	40	150	130	1,170	
900	900	1,058	1,054	1,036	1,204	75	85	115		160	150	1,520	
1,000	1,000	1,172	1,168	1,150	1,332	82	96	120		165	165	1,850	
1,100	1,100	1,286	1,282	1,260	1,458	88	100	125		175	175	2,190	
1,200	1,200	1,400	1,396	1,374	1,586	95	104	130	42	185	190	2,600	
1,350	1,350	1,566	1,562	1,540	1,768	103	108	135		195	205	3,190	

注：呼び径150～350の管の有効長は1,000mm、呼び径400～1,350の管の有効長は、1,200mmとすることができる。